


## LUMI 45-90 ST

1707-45-1718 • 1707-70-1718 • 1707-90-1718



# LUMI 45-90 ST

1707-45-1718 • 1707-70-1718 • 1707-90-1718

The Helo Lumi has a new elegant tapered chrome steel cover design and holds up to 20-23 kg of stones for softer heating. The ST models have handy manual controls, easily accessible on the side of the heater, with a built in timer and thermostat. The heater can be installed with controls on either right or left hand side.

Sauna volume:	Model variants:
<p><b>1-4 m<sup>3</sup></b></p>	<p><b>Lumi 45</b> 3,0-6,0 m<sup>3</sup> 4,5 kW stones 20-23 kg</p>
<p><b>4-8 m<sup>3</sup></b></p>	<p><b>Lumi 70</b> 5,0-10,0 m<sup>3</sup> 6,8 kW stones 20-23 kg</p>
<p><b>8-12 m<sup>3</sup></b></p>	<p><b>Lumi 90</b> 9,0-13,0 m<sup>3</sup> 9,0 kW stones 20-23 kg</p>
<p><b>12-46 m<sup>3</sup></b></p>	
<p><b>Heater size (w/h/d), mm:</b></p> <p><b>Model:</b></p>	<p>500 x 435 x 265</p> <p>ST with built-in timer and thermostat.</p>

HEATER INSTALLATION SAFE CLEARANCE												
Power	Saunavolume m <sup>3</sup>			Minimum safe clearance				Minimum safe clearance to mounting plate		Optimal stone weight	Heater power cable HO7RN-F / 60245 IEC 66	
	Minimum	Maximum	Minimum height	Sides	Front	Ceiling	Floor	mm	mm		kg	3xA
4,5 kW	3	6	1900	50	80	1200	120	200	90	20-23	10	5x1,5
6,8 kW	5	10	1900	80	100	1250	120	250	90	20-23	10	5x1,5
9,0 kW	8	13	1900	100	150	1250	120	250	90	20-23	16	5x2,5

### MANUAL CONTROL UNIT


- preset/heating time
- temperature control



Handy manual controls



Chrome steel cover

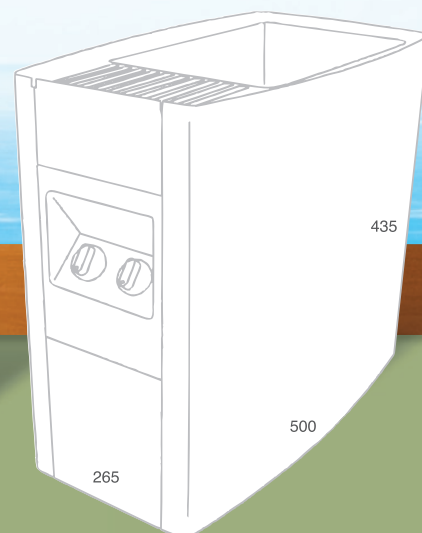

New curved design